

The TSFM500 test stand is designed for compression and tension testing of springs, packaging, metals, fabrics, and other items requiring up to 500 lbF of force. Generous clearance and throat depth accommodate a broad range of sample shapes and sizes. The TSFM500's durable and rigid column minimizes bend, making it particularly well suited for precision spring testing.

Speed is adjustable and a remote control unit provides added safety during testing. Other features include a manual fine adjustment knob and a stepper motor that prevents speed variation with load, making testing precise and repeatable.

When used with a Series 5 or Series 4 force gauge, travel can be stopped at user-selectable force set points (requires optional cable).

Available in vertical and horizontal configurations.

## Specifications


Load capacity:	500 lbF [2200 N]
Maximum travel:	4.0 in [102 mm]
Speed range:	0.2 - 5.5 in/min [5 - 140 mm/min]
Speed setting accuracy:	±5%, ±0% variation with load
Weight (w/o optional equipment):	
Test stand:	TSFM500: 36 lb [16.3 kg], TSFM500H: 30 lb [13.6]
Control unit:	2.7 lb [1.2 kg]
Power:	Universal input 80-240 VAC, 50/60 Hz
Included accessories:	Tool kit, three hooks (small, medium, and large), 2" and 3" compression plates, two couplers (#10-32 and 5/16-18), force gauge mounting hardware
Warranty:	3 years (see statement for further details)

## Optional Equipment

Digital travel display TSF001	6 in [150 mm] travel, 0.0005 in [0.01 mm] resolution, 0.001 in [0.03 mm] accuracy, SPC output for data collection.
Limit switch kit TSFM002	Set of adjustable upper and lower solid state limit switches.
Overload / Set Point Cable 09-1180	Stops test stand travel at programmable high and low set points for tension and compression forces. Also protects the force gauge against accidental overloads during motorized tests. Compatible with Series 5 and Series 4 force gauges. Can be used simultaneously with the USB data output cable supplied with the gauge.



The TSFM500 is shown in a typical spring testing application, with Model M5-1000 digital force gauge and compression plate.

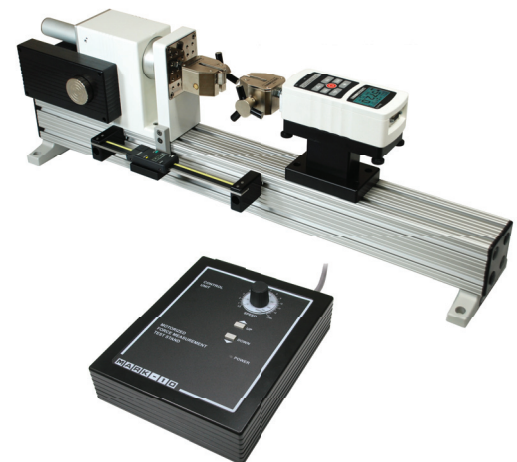

The TSFM500H is shown set up for a tensile test, with Model M5-1000 digital force gauge and wedge grips.

>> Digital travel display




>> Limit switch kit




## Dimensions

in [mm]

### TSFM500

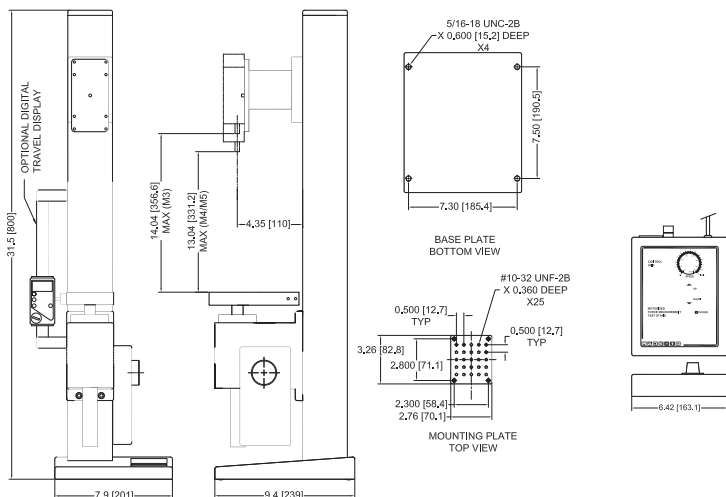

### TSFM500H

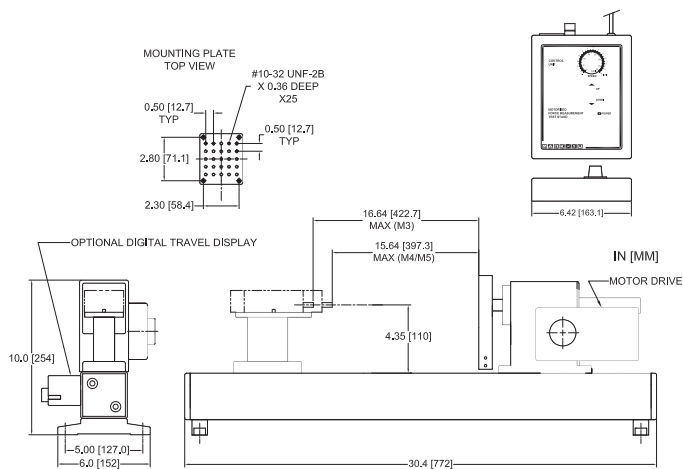

## Ordering Information

Model No.	Description
TSFM500	Test stand, motorized, 500 lbF, vertical, 110V
TSFM500E	Test stand, motorized, 500 lbF, vertical, 220V, Euro Plug
TSFM500U	Test stand, motorized, 500 lbF, vertical, 220V, UK Plug
TSFM500A	Test stand, motorized, 500 lbF, vertical, 220V, Australian Plug
TSF001	Digital travel display
TSFM002	Limit switch kit
09-1180	Overload / set point cable, Series 5/4 gauge to test stand